

# Towards Efficient Multi-Codec Streaming

**Yuriy A. Reznik**  
**Brightcove, Inc.**  
**Seattle, WA, USA**  
yreznik@brightcove.com

**Abstract** – One of the biggest challenges in modern-era media delivery systems is the fragmentation of the population of the receiving devices in terms of codec capabilities. For example, modern Apple devices can decode and seamlessly switch between H.264/AVC and HEVC streams. Most new TVs or set-top boxes can also decode HEVC, but they cannot switch between HEVC and H.264/AVC streams in the same streaming session. And there are still plenty of older devices/streaming clients that can only receive and decode H.264/AVC streams. With the arrival of next-generation codecs - such as AV1 and VVC, the fragmentation of codec support across devices becomes even more complex. This situation brings a question - how can we serve such a population of devices most efficiently by using codecs delivering the best performance in all cases yet producing the minimum possible number of streams and such that the overall cost of media delivery is minimal? In this paper, we explain how this problem can be formalized and solved at the stage of dynamic generation of encoding profiles for ABR streaming. The proposed solution effectively generalizes the per-title or context-aware encoding (CAE) class-of techniques, considering multiple sets of renditions generated using each codec and codec usage distributions by the population of the receiving devices. We also discuss additional system-level means (proper manifest generation, HLS and DASH quality annotations, device detection, and edge logic) needed to make the proposed solution practically deployable.

## 1. Introduction

During the last decade, most video streams sent over the Internet have been encoded using the ITU-T H.264 / MPEG-4 AVC video codec [1]. Developed in the early 2000s, H.264/AVC has become broadly supported on various devices and platforms. According to the [www.caniuse.com](http://www.caniuse.com) analytics website [2], the current reach of H.264 across web platforms is approaching an overwhelming 97.93%.

However, in terms of technology, H.264/AVC codec is pretty old. In recent years, several more advanced codecs have been introduced. The two best-known ones are: the HEVC codec [3] from ISO/ISO MPEG and ITU-T standards committees and AV1 [4] from the Alliance for Open Media. Both technologies claim about 40-50% gain in compression efficiency over the H.264/AVC [6-8]. Even higher gains have been recently reported for an emerging VVC coding standard [5,8,9].

In theory, such gains should lead to a significant reduction in streaming costs. However, in practice, these new codecs can only reach particular subsets of the existing devices or web browsers. For example, for HEVC, [www.caniuse.com](http://www.caniuse.com) reports only 18.73% reach, pointing primarily to Apple devices incorporating hardware HEVC support. The AV1's support among web browsers is higher, but notably, it is not supported by Apple devices and most currently deployed set-top box platforms [2,9].

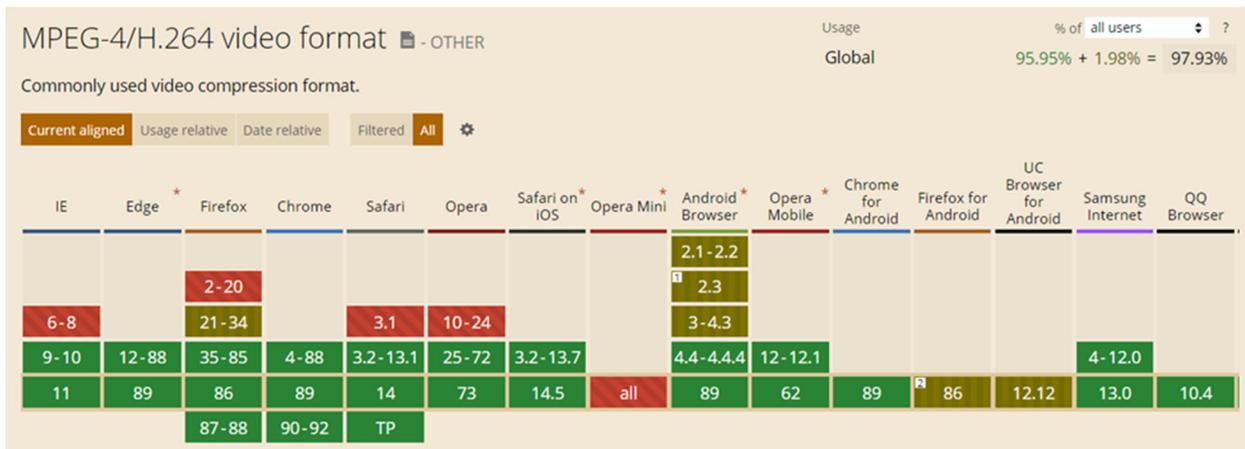


FIGURE 1: SUPPORT OF H.264/AVC VIDEO CODECS ACROSS DIFFERENT PLATFORMS (SOURCE: WWW.CANIUSE.COM [2]).

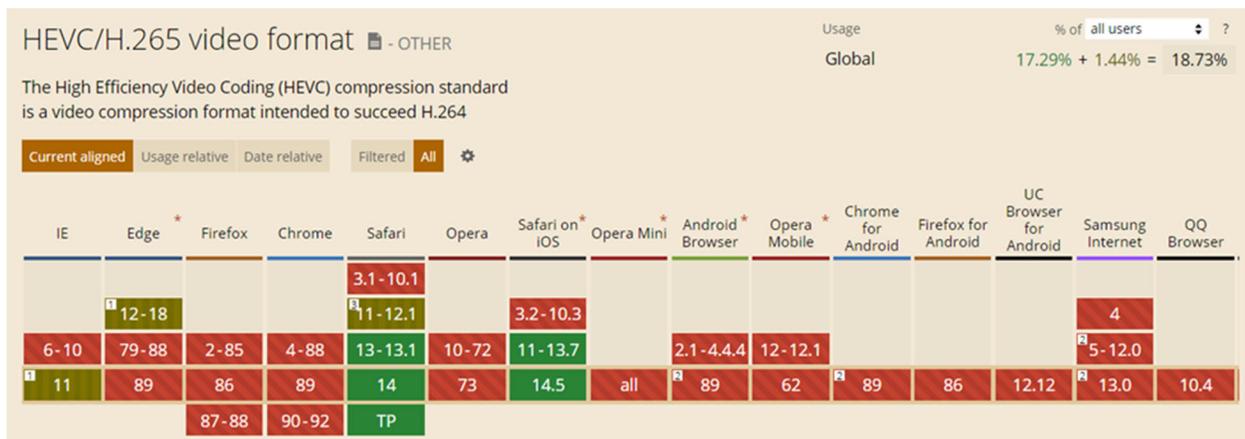


FIGURE 2: SUPPORT OF HEVC VIDEO CODECS ACROSS DIFFERENT PLATFORMS (SOURCE: WWW.CANIUSE.COM [2]).

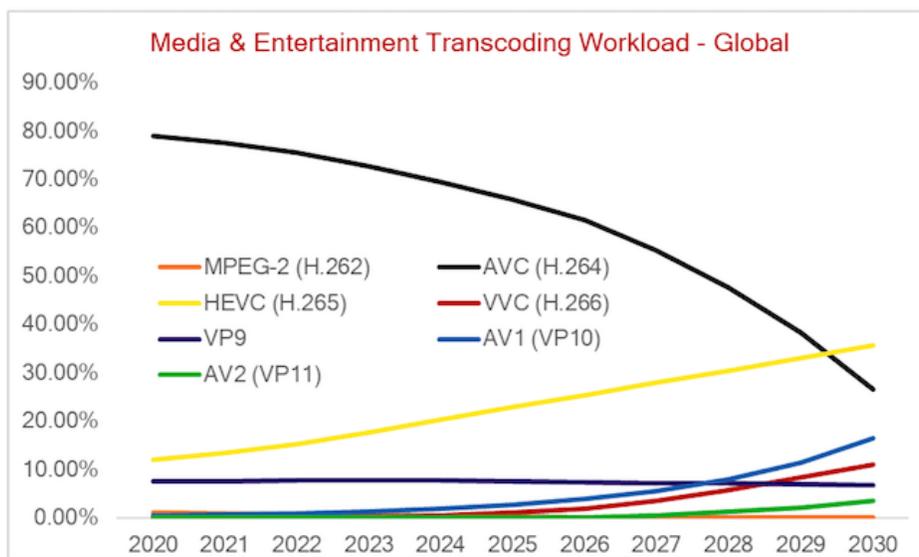


FIGURE 3: PREDICTED USAGE OF VIDEO CODECS IN THE NEXT 10 YEARS (SOURCE: RETHINKTV [9]).

This situation brings a question – how do we serve such a fragmented population of devices most efficiently by using codecs delivering the best performance in all cases, yet producing the minimum possible number of streams, and such that the overall cost of media delivery is minimal?

In this paper, we will explain how this problem can be formalized and solved at the stage of dynamic generation of encoding profiles for ABR streaming. The proposed solution effectively generalizes the per-title or context-aware encoding (CAE) class-of techniques [10-15], considering multiple sets of renditions generated using each codec and codec usage distributions by the population of the receiving devices. The proposed solution also utilizes advanced signaling mechanisms in HLS [16] and MPEG DASH [17], as well as current deployment guidelines and interoperability requirements developed for these standards [18-20]. An example of the practical realization of such a multi-codec streaming system and various additional means for increased robustness and reach will also be described.

This paper is organized as follows. In the first 5 sections, we will provide background information: introduce the concept of ABR streaming, ladders, single-codec and multi-codec operation, etc. Section 6 will define the problem of the optimal design of ABR ladders for multi-codec streaming. Section 7 will explain how to generate multi-codec HLS and DASH manifest files. Additional practical considerations and conclusions will be provided in Sections 8 and 9.

## 2. Adaptive bitrate streaming: main principles

Let us first briefly review the main principles of operation of modern-era Adaptive Bit-Rate (ABR) streaming systems based on HLS [16] or DASH [17] standards. We show a conceptual diagram of such a system in Figure 4. For simplicity, we only consider the VOD delivery case.

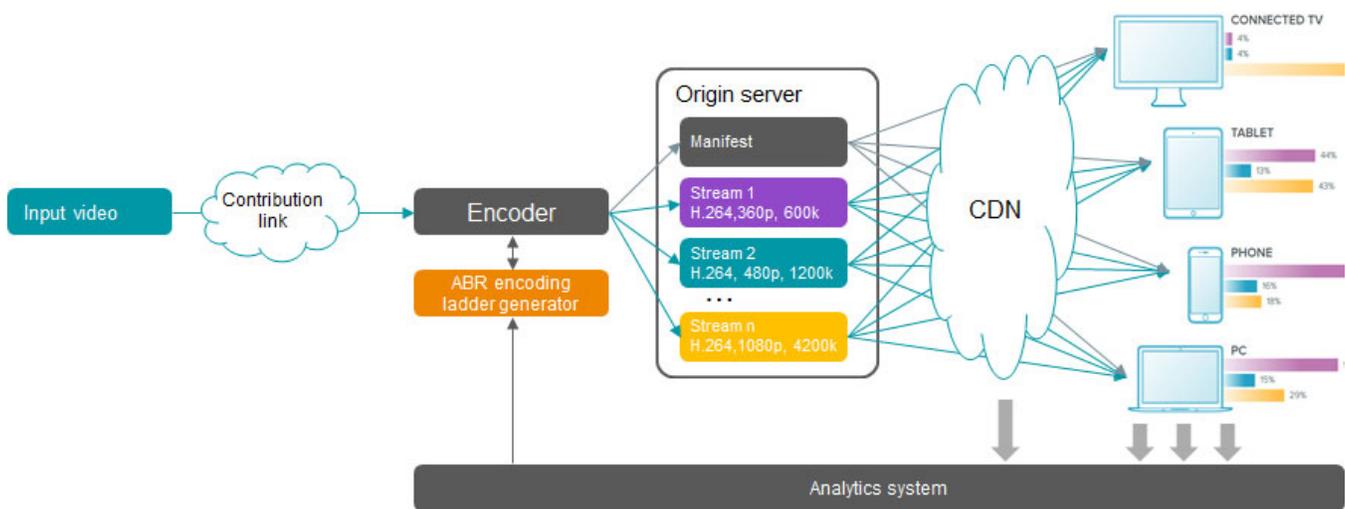


FIGURE 4: TYPICAL ARCHITECTURE OF HTTP-BASED ADAPTIVE BITRATE STREAMING SYSTEM.

As shown in this figure, when an input *video asset* is prepared for ABR streaming, it is typically transcoded into several *renditions* (or *variant streams*). Such renditions typically have different bitrates, resolutions, and other codecs- and presentation-level parameters.

Once all renditions are generated, they are placed on an HTTP web server called the *origin server*. Along with the set of renditions, the origin server also receives *manifest files* describing the properties of the encoded streams. In the HLS streaming standard [16], such manifests are called "playlists," while in the MPEG-DASH standard [17], they are called "media presentation description" or "mpd" files.

The subsequent delivery of the encoded content to user devices is done over HTTP and by using Content Delivery Network (CDN). The use of CDNs ensures the reliability and scalability of the delivery system.

To play the content, user devices use special software called *streaming clients*. In the simplest form, a streaming client can be JavaScript code run by a web browser. It may also be a custom application or a video player supplied by the OS. Regardless of the implementation, most streaming clients include the logic for adaptive selection of streams/renditions during the playback.

For example, if the client notices that the observed network bandwidth is too low to support real-time playback of the current rendition, it may decide to switch to a lower bitrate rendition. This switch prevents buffering. Otherwise, the client may switch to a higher bitrate / higher quality rendition if there is sufficient bandwidth. This switch leads to a better quality of experience. This logic is what makes streaming delivery adaptive. It is also the main reason for multiple (typically 5-10) renditions. For information about the origins of ABR streaming and other benefits of multi-rate design, the reader is referred to publications [21-23].

The system depicted in Figure 4 has two additional components: the *analytics system*, collecting the playback statistics from CDNs and streaming clients, and the *ABR encoding ladder generator*, defining the number of renditions and properties of each rendition to create. For example, in the Brightcove VideoCloud streaming system [24], this block corresponds to Context-Aware Encoding (CAE) [25] module. We will explain the significance of the encoding ladder generation operation next.

### 3. Encoding ladders

Let us now consider an example of an encoding ladder created for streaming. This particular example was created using the Brightcove CAE generator [25] for an action-movie asset.

Rendition	Codec	Resolution	Framerate	Bitrate [Kbps]	Quality [MOS]
1	H.264	384x216	25	261.59	2.178
2	H.264	512x288	25	513.54	2.719
3	H.264	768x432	25	1024.37	3.408
4	H.264	1280x720	25	2075.71	4.215
5	H.264	1920x1080	25	4203.03	4.769

TABLE 1: EXAMPLE SINGLE-CODEC ABR ENCODING LADDER.

This ladder defines 5 streams, enabling video delivery with resolutions from 216p to 1080p and using from about 260 Kbps to 4200 Kbps in network bandwidth. All streams are encoded using H.264/AVC codec [1]. The last column in this table lists perceived visual quality scores as estimated for playback of these renditions on a PC screen. These values are reported using the standard Mean Opinion Score (MOS) scale [26].

In Figure 5, we plot the (bitrate, quality) points corresponding to all renditions. We also show a trend of the best quality levels achievable by the streaming system with varying network bandwidth. This trend becomes a *step function*, shown in blue.

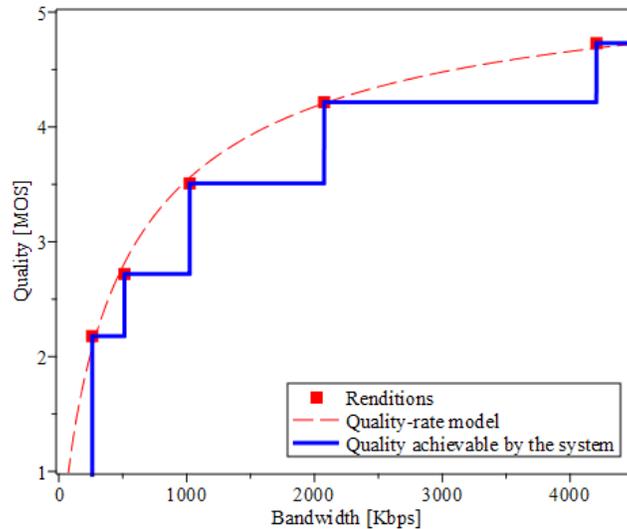


FIGURE 4: BEST QUALITY ACHIEVABLE BY A STREAMING SYSTEM AS A FUNCTION OF NETWORK BANDWIDTH.

Figure 5 also plots the so-called *quality-rate model* function [12-14]. This function describes the quality achievable by encoding the content with the same encoder operating at every possible bitrate point within the same range of bitrates. A dashed red curve shows this function.

As it can be easily grasped, with proper ladder design, the rendition points become a subset of points from the quality-rate model, and the step function describing quality achievable by streaming becomes an approximation of this model. What influences the quality of the streaming system is the number of renditions in the encoding ladder and the placement of renditions along the bandwidth axis. The closer the resulting step function is to the quality-rate model – the better is the quality that the streaming system can deliver.

This example shows that the encoding profiles/ladders for ABR streaming must be carefully designed. This is why most modern streaming systems employ special profile generators to perform this step dynamically by accounting for the properties of the content, networks, and other relevant contexts. Related techniques are known as "per-title," "content-aware," and "context-aware" encoding techniques [10-15].

#### 4. Multi-codec streaming: ladders and adaptation models

Now that we've explained the key concepts, we can turn our attention to multi-codec streaming. To make this presentation more specific, let us again consider an example of an encoding ladder generated by using two codecs: H.264/AVC and HEVC.

Rendition	Codec	Resolution	Framerate	Bitrate [Kbps]	Quality [MOS]
1	H.264	384x216	25	261.59	2.178
2	HEVC	512x288	25	300	2.529
3	H.264	512x288	25	513.54	2.719
4	HEVC	768x432	25	607.89	3.260
5	H.264	768x432	25	1024.37	3.408
6	HEVC	1024x576	25	1166.03	3.793
7	H.264	1280x720	25	2075.71	4.215

8	HEVC	1600x900	25	2362.74	4.549
9	H.264	1920x1080	25	4203.03	4.769
10	HEVC	1920x1080	25	4203.45	4.915

TABLE 2: EXAMPLE ENCODING LADDER FOR TWO CODECS: H.264 AND HEVC.

The plots of rendition points, quality-rate models, and quality achievable by streaming clients decoding only sets of H.264 and HEVC streams are presented in Figure 6.

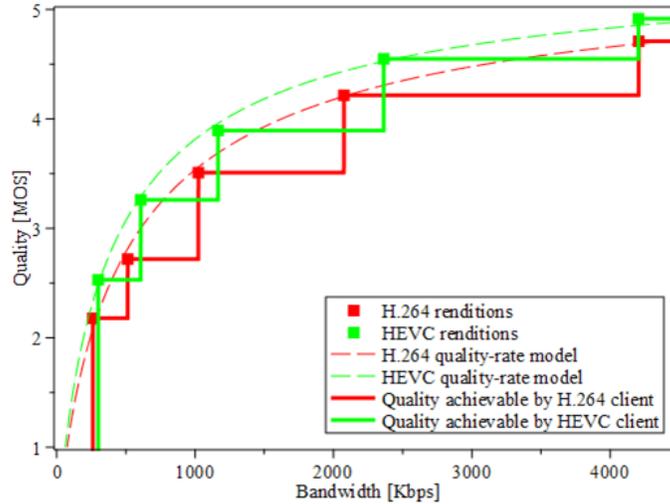


FIGURE 6: BEST QUALITY ACHIEVABLE BY STEAMING SYSTEMS USING H.264 AND HEVC CODECS.

As easily observed, the quality-rate model function for HEVC is consistently better than the quality-rate model for H.264/AVC. By the same token, HEVC renditions should also deliver better quality-rate tradeoffs than renditions encoded using H.264/AVC encoder.

However, considering that there are typically only a few rendition points, and they may be placed sparsely and in an interleaved pattern, this may create regions of bitrates, where H.264/AVC renditions may deliver better quality than the nearest HEVC rendition of smaller or equal bitrate. Such regions in the above figure are seen when step functions for H.264/AVC clients go above the same functions for HEVC clients.

What does this mean? This means that 2-codec ladder decoding of only HEVC-encoded streams does not automatically result in the best possible quality! Even better quality may be achieved by clients that selectively and intelligently switch between H.264/AVC and HEVC streams. We illustrate the quality achievable by such "2-codec clients" in Figure 7.

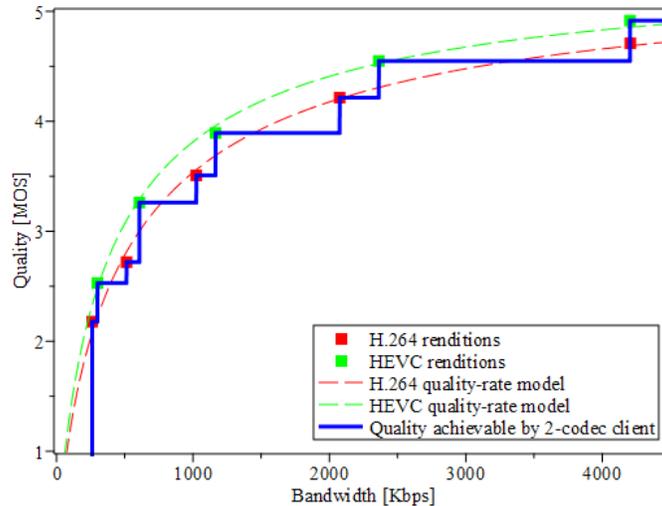


FIGURE 7: BEST QUALITY ACHIEVABLE BY A STREAMING SYSTEM EMPLOYING "2-CODEC CLIENT".

In this example, the 2-codec client can make 9 adaptation steps instead of just 5 in HEVC or H.264-only ladders. This enables better utilization of the available network bandwidth and delivery of better quality overall. This also allows fewer renditions using both H.264 and HEVC codecs to be generated, as both subsets are effectively used for adaptation.

## 5. Multi-codec support in existing streaming clients

As we just noticed, the ability of the streaming client not only to decode but also intelligently and seamlessly switch between H.264/AVC and HEVC streams is extremely important. This leads to better quality and allows the reduction in the total number of streams, reducing streaming costs.

Perhaps the best-known examples of existing clients supporting codec switching are native players in most new Apple devices: iPhones, iPads, Mac computers, etc. They can decode and seamlessly switch between H.264/AVC and HEVC streams. Recent versions of Chrome and Firefox web browsers have added support for so-called *changeType()* method, which allows JavaScript-based streaming clients to implement switching between codecs. Using this method we may expect most web-browser-based clients to add codec switching capability in the future.

But there are indeed some other platforms, such as some SmartTVs, set-top boxes, etc., that can only decode either H.264/AVC or HEVC streams and won't switch to another codec during a streaming session. And naturally, there are also plenty of legacy devices that can only decode H.264/AVC encoded streams.

This fragmented space of streaming clients and their capabilities must be accounted for at stages of the generation of encoding ladders, properly defining HLS and DASH manifests, and design of the delivery system for multi-codec streaming.

## 6. Efficient multi-codec ABR profile generation

We will next discuss the problem of optimal design of encoding ladders. Our presentation will closely follow the notations and concepts introduced earlier in [12,13].

### Definitions

For simplicity, we will consider a case of 2 codecs and 3 clients with a conceptual diagram of the system presented in Figure 8.

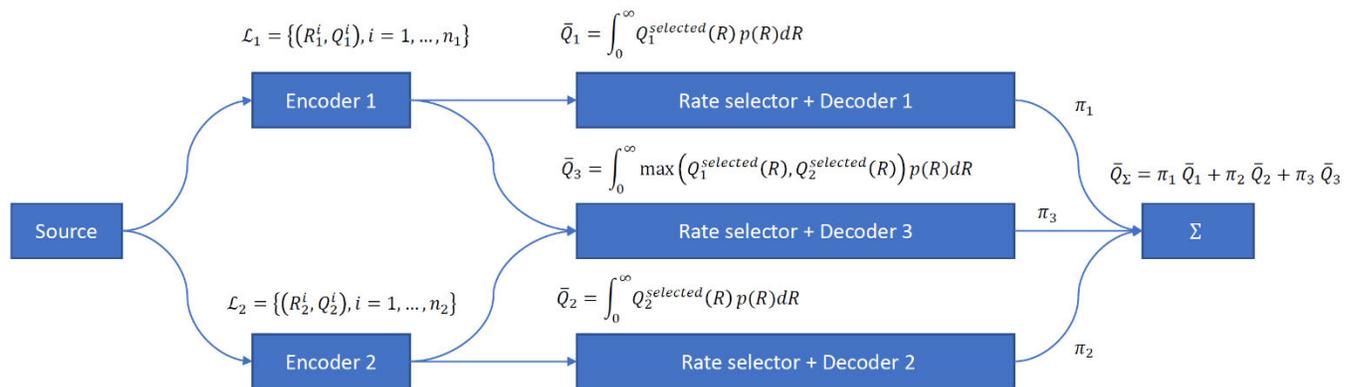


FIGURE 8: CONCEPTUAL DIAGRAM ABR STREAMING SYSTEM WITH 2 ENCODERS AND 3 TYPES OF DECODERS/CLIENTS. DECODER 1 AND 2 CAN DECODE ONLY STREAMS FROM ENCODER 1 AND 2 RESPECTIVELY. DECODER/CLIENT 3 CAN DECODE AND SWITCH BETWEEN STREAMS FROM BOTH ENCODERS.

Translating this to practice, we can think that codec 1 is H.264/AVC, codec 2 is HEVC, client 1 is the one that can only decode H.264/AVC streams, client 2 is the one that can decode HEVC streams, and client 3 is the one that can decode both H.264/AVC or HEVC streams and can switch between them during the streaming session.

By  $\mathcal{L}_1$  and  $\mathcal{L}_2$  we denote *encoding ladders* produced by using codecs of type 1 and 2 respectively. Mathematically, we will assume that each ladder is presented by a set of (rate, quality) points, corresponding to the bitrate and quality characteristics of its renditions:

$$\mathcal{L}_1 = \{(R_1^i, Q_1^i), i = 1, \dots, n_1\}, \text{ and } \mathcal{L}_2 = \{(R_2^i, Q_2^i), i = 1, \dots, n_2\}$$

Here, by  $R_j^i$  we denote bitrates and by  $Q_j^i$  we denote quality values of each rendition. The sub-indices indicate codec type. The upper indices indicate rendition number in each set. The values  $n_1$  and  $n_2$  denote the number of renditions in each set, and  $n = n_1 + n_2$  denotes the total number of all renditions used for streaming.

As in [12], we further assume that the performance of each codec can be modeled by certain *quality-rate functions*:  $Q_1(R)$  and  $Q_2(R)$ , and that above (quality, rate) points can be understood as samples taken from these functions:

$$Q_1^i = Q_1(R_1^i), i = 1, \dots, n_1, \text{ and } Q_2^i = Q_2(R_2^i), i = 1, \dots, n_2.$$

Also, as in [12], the behavior of the *network bandwidth* during streaming session is modeled as a *continuous random variable*  $R$  with known (or empirically measured) probability density function  $p(R)$ .

On the receiver-end, we assume that clients follow *idealized client model* [12], selecting maximum ladder rate  $R^i$  that is less or equal than available network bandwidth  $R$ :

$$R_1^{\text{selected}}(R) = \max_{\substack{i=1, \dots, n_1 \\ R_1^i \leq R}} R_1^i, \text{ and } R_2^{\text{selected}}(R) = \max_{\substack{i=1, \dots, n_2 \\ R_2^i \leq R}} R_2^i.$$

Assuming monotonically increasing quality-rate models, this also implies that:

$$Q_1^{selected}(R) = \max_{\substack{i=1,\dots,n_1 \\ R_1^i \leq R}} Q_1(R_1^i), \text{ and } Q_2^{selected}(R) = \max_{\substack{i=1,\dots,n_2 \\ R_2^i \leq R}} Q_2(R_2^i).$$

### Average quality achievable by the streaming system

Next, given all above definitions, we write expressions for the *average quality* values achievable by clients / decoders of each kind.

For instance, the *average quality* achieved by client 1 when working with ladder  $\mathcal{L}_1$  and network with bandwidth distribution  $p(R)$  becomes:

$$\bar{Q}_1 = \int_0^\infty Q_1^{selected}(R) p(R) dR.$$

Similarly, the *average quality* achieved by client 2, working with ladder  $\mathcal{L}_2$ , becomes:

$$\bar{Q}_2 = \int_0^\infty Q_2^{selected}(R) p(R) dR.$$

Finally, for client 3, which is capable of working with both ladders  $\mathcal{L}_1$  and  $\mathcal{L}_2$ , including switching between all such streams, the expression for the average quality becomes:

$$\bar{Q}_3 = \int_0^\infty \max(Q_1^{selected}(R), Q_2^{selected}(R)) p(R) dR.$$

The  $\max()$  function in the above expression reflects the capability of a dual-codec client to select best streams across renditions encoded by both codecs.

The average quality achieved by the entire population of clients, becomes:

$$\bar{Q}_\Sigma = \pi_1 \bar{Q}_1 + \pi_2 \bar{Q}_2 + \pi_3 \bar{Q}_3,$$

where  $\pi_1, \pi_2, \pi_3$  denote normalized ( $\pi_1 + \pi_2 + \pi_3 = 1$ ) population counts of clients of each kind.

### Optimal multi-codec ladder design

By considering all above definitions, and observing that average quality value  $\bar{Q}_\Sigma$  can be understood as a function of network bandwidth density  $p(R)$ , client distribution  $\pi$ , the number of ladder points  $n_1, n_2$ , and the sets of rates used in the ladder, we are now ready to define the following ladder optimization problem.

Given:

- the total number of ladder points  $n$ ,
- limits for all rate points:  $R_{\min}, R_{\max}$ ;
- maximum limits for first rate points:  $R_{\max}^1$ ,
- quality-rate functions for both codecs and content  $Q_1(R), Q_2(R)$
- network bandwidth density  $p(R)$ , and
- distribution of clients  $\pi$ ,

Find:

- numbers  $\hat{n}_1, \hat{n}_2$ , such that  $\hat{n}_1 + \hat{n}_2 = n$ , and

- ladder rates  $\hat{R}_1^1, \dots, \hat{R}_1^{\hat{n}_1}$  and  $\hat{R}_2^1, \dots, \hat{R}_2^{\hat{n}_2}$

such that overall quality  $\bar{Q}_\Sigma$  delivered by the streaming system is maximal:

$$\bar{Q}_\Sigma(p, \pi, n, \hat{R}_1^1, \dots, \hat{R}_1^{\hat{n}_1}, \hat{R}_2^1, \dots, \hat{R}_2^{\hat{n}_2}) = \max_{\substack{n_1 + n_2 = n \\ R_{\min} \leq R_1^1 \leq \dots \leq R_1^{n_1} \leq R_{\max} \\ R_{\min} \leq R_2^1 \leq \dots \leq R_2^{n_2} \leq R_{\max} \\ R_1^1, R_2^1 \leq R_{\max}^1}} \bar{Q}_\Sigma(p, \pi, n, R_1^1, \dots, R_1^{n_1}, R_2^1, \dots, R_2^{n_2}). \quad (*)$$

As easily noticed, this problem folds into a class of non-linear constrained optimization problems. The details about the design of a numerical solver for this problem and examples of solutions can be found in [13].

### Additional remarks

We note that all constraints introduced in the problem setting (\*) are essential in practice. For example, the maximum rate limit  $R_{\max}$  is needed to prevent allocation of bitrates beyond those that are physically achievable. The minimum rate limit  $R_{\min}$  is usually related to minimum quality level at which streaming as service is even feasible. The limit on maximum first rate in the ladder  $R_{\max}^1$  is typically used to limit start-up time and/or buffering probability of clients, etc. In practice, several additional constraints may also be introduced.

We also note, that while (\*) does not explicitly operate with the choices of *video resolutions* for each stream, it is assumed, that the best choices of resolutions are already absorbed in the definition of quality-rate models for each codec. In other words, given a set of allowed resolutions  $\mathcal{S}$  and quality-rate models  $Q_1(S, R)$ , obtained for each specific resolution  $S \in \mathcal{S}$ , we will assume that final quality rate model  $Q_1(R)$  is defined such that

$$Q_1(R) = \sup_{S \in \mathcal{S}} Q_1(S, R).$$

This way, the ladder optimization problem becomes effectively reduced to the choice of bitrates needed for each rendition.

### Practical implementation

The described mathematical problem and its solution finder form the basis for the design of the profile generator in the Brightcove CAE system [25].

As shown in in Figure 9, the Brightcove CAE system includes several "ingest profiles", with the "Multiplatform Extended HEVC (CAE) mixed-codec" profile corresponding to a mode where both H.264 and HEVC codecs will be used in final generated streams. Our example profiles, shown earlier in Tables 1 and 2 have been generated by using this system.

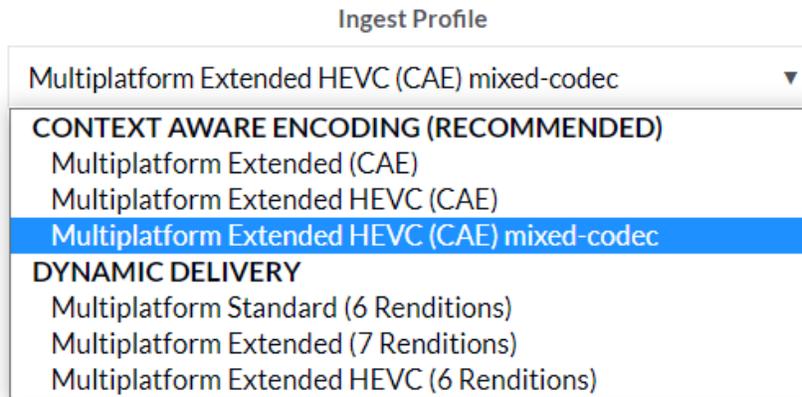


FIGURE 9: MULTI-CODEC STREAMING OPTIONS AVAILABLE IN BRIGHTCOVE VIDEOCLOUD SYSTEM [24,25].

When operating this system, the users can customize some overall ladder parameters – such as the limits on the numbers of renditions, ranges of resolutions and bitrates, assumed network and usage distributions, etc. But the final choices for the number of renditions, and their parameters (resolutions, bitrates, codec HRD controls, etc.) are all done automatically by the CAE system.

## 7. Using multi-codec features of HLS and DASH

In designing multi-codec streaming systems, particular attention must also be paid to proper generation of HLS and DASH manifests.

One of the important components of such design is the inclusion of *quality attributes* that may be needed to better guide selection of renditions by the streaming clients. This is important because in mixed-codec ladders the increase in stream bitrates may no longer mean the increase in quality. In our example ladder in Figure 6, the monotonicity of bitrate-quality relations is preserved by proper choices of codecs and bitrates, but more generally, it may not be the case. An HEVC stream with lower bitrate may have a better quality than H.264/AVC stream using more bits. Hence quality-related attributes are important.

Additionally, there is always the need to make sure manifests are generated in a backwards-compatible fashion such that older generation clients, which can only recognize a subset of declarations, would still operate properly.

And, there are also certain new and advanced features of both HLS [16] and DASH [17] standards, as well as limitations imposed by HLS deployment guidelines [18] and DASH-IF interoperability requirements [20], that become important to account in such designs.

To explain some of these nuances, in Figures 10 and 11, we show sketches of the HLS and DASH manifests constructed for a composition of H.264 and HEVC streams from the ABR ladder in Table 2.

```
#EXTM3U
...
#EXT-X-STREAM-INF:BANDWIDTH=267868,CODECS="avc1.4d401e",RESOLUTION=384x216,SCORE=1, ...
Rendition1.m3u8
#EXT-X-STREAM-INF:BANDWIDTH=307200,CODECS="hvc1.1.6.L90.90",RESOLUTION=512x288,SCORE=2, ...
Rendition2.m3u8
#EXT-X-STREAM-INF:BANDWIDTH=525864,CODECS="avc1.4d401e",RESOLUTION=512x288,SCORE=3, ...
Rendition3.m3u8
#EXT-X-STREAM-INF:BANDWIDTH=75378,CODECS="hvc1.1.6.L90.90",RESOLUTION=768x432,SCORE=4, ...
Rendition4.m3u8
#EXT-X-STREAM-INF:BANDWIDTH=1048954,CODECS="avc1.4d401e",RESOLUTION=768x432,SCORE=5, ...
```

```

Rendition5.m3u8
#EXT-X-STREAM-INF:BANDWIDTH=1194014,CODECS="hvc1.1.6.L93.90",RESOLUTION=1024x576,SCORE=6, ...
Rendition6.m3u8
#EXT-X-STREAM-INF:BANDWIDTH=2125527,CODECS="avc1.640028",RESOLUTION=1280x720,SCORE=7, ...
Rendition7.m3u8
#EXT-X-STREAM-INF:BANDWIDTH=2419445,CODECS="hvc1.1.6.L120.90",RESOLUTION=1600x900,SCORE=8, ...
Rendition8.m3u8
#EXT-X-STREAM-INF:BANDWIDTH=4303902,CODECS="avc1.640028",RESOLUTION=1920x1080,SCORE=9, ...
Rendition9.m3u8
#EXT-X-STREAM-INF:BANDWIDTH=4304332,CODECS="hvc1.1.6.L120.90",RESOLUTION=1920x1080,SCORE=10, ...
Rendition10.m3u8
...

```

Figure 10: HLS master playlist (.m3u8) file created for ABR ladder from Table 2.

```

MPD xmlns="urn:mpeg:dash:schema:mpd:2011" minBufferTime="PT1.500S" type="static" ... >
<Period duration="PT0H12M14.167S">
<SupplementalProperty schemeldUri="urn:mpeg:dash:qr-equivalence:2019" value="1,2" />
<AdaptationSet id="1">
  <SupplementalProperty schemeldUri="urn:mpeg:dash:adaptation-set-switching:2016" value="2" />
  <Representation id="1" mimeType="video/mp4" codecs="avc1.42001e" bandwidth="267868" qualityRanking="10" .../>
  <Representation id="2" mimeType="video/mp4" codecs="avc1.42001e" bandwidth="5525864" qualityRanking="8" .../>
  <Representation id="3" mimeType="video/mp4" codecs="avc1.42001e" bandwidth="1048954" qualityRanking="6" .../>
  <Representation id="4" mimeType="video/mp4" codecs="avc1.640028" bandwidth="2125527" qualityRanking="4" .../>
  <Representation id="5" mimeType="video/mp4" codecs="avc1.640028" bandwidth="4303902" qualityRanking="2" .../>
</AdaptationSet>
<AdaptationSet id="2">
  <SupplementalProperty schemeldUri="urn:mpeg:dash:adaptation-set-switching:2016" value="1" />
  <Representation id="1" mimeType="video/mp4" codecs="hvc1.1.6.L90.90" bandwidth="307200" qualityRanking="9" .../>
  <Representation id="2" mimeType="video/mp4" codecs="hvc1.1.6.L90.90" bandwidth="75378" qualityRanking="7" .../>
  <Representation id="3" mimeType="video/mp4" codecs="hvc1.1.6.L93.90" bandwidth="1194014" qualityRanking="5" .../>
  <Representation id="4" mimeType="video/mp4" codecs="hvc1.1.6.L120.90" bandwidth="2419445" qualityRanking="3" .../>
  <Representation id="5" mimeType="video/mp4" codecs="hvc1.1.6.L120.90" bandwidth="4304332" qualityRanking="1" .../>
</AdaptationSet>
</Period>
</MPD>

```

Figure 11: DASH media presentation description (MPD) file created for ABR ladder from Table 2.

As shown in these figures, in the HLS system, all HEVC and H.264/AVC renditions can be included in the natural order in the master playlist. However, in MPEG DASH, they must be listed separately, in different *adaptation sets*, defined independently for each codec. To enable switching between HEVC and AVC renditions, the "adaptation-set-switching:2016" *SupplementalProperty* descriptors must be included in each adaptation set.

Such separate placement of renditions in DASH is needed to improve compatibility with legacy players. It is required by DASH-IF Interoperability Guidelines [19]. This practice also enables conformance with CTA WAVE content specification [20] which defines its media profiles on a per-codec level.

By looking at Figures 10 and 11, we next note that the means for adding quality annotations in HLS and DASH are quite different.

In HLS, quality related parameters are called "SCORE" attributes, with higher values indicating better quality. In MPEG DASH, they are called "qualityRanking" attributes, but now with lower values indicating better quality. Furthermore, since HEVC and AVC renditions in DASH become split across different adaptation sets, the "qualityRanking" attributes should be produced to indicate correct and unique relative rankings values for the entire set of renditions and the "qr-equivalence:2019" *SupplementalProperty* descriptor must be included at the period level. This extra descriptor advises

client that "qualityRanking" attributes represent correct relative quality values considering the complete set of all renditions.

All other standard content-related requirements and constraints as specified in HLS authoring specification [18] and DASH-IF interoperability guidelines [20] must also be considered in the design of encoding profiles and manifests for multi-codec streaming.

## 8. Additional practical considerations

While the above-described declarations in HLS and DASH manifest should ensure interoperability across all proper implementations of HLS and DASH clients, in practice, there may still be a risk that some legacy clients may be confused by the presence of extra renditions or manifest descriptors and will not start play of the stream or will not play it well.

Sometimes suboptimal behaviors may also be encountered with newer devices/clients, which attempt to support new codecs or features of HLS or DASH, but their implementations are not yet mature.

To minimize the likelihood of running in such situations, advanced streaming systems may employ *device detection* and *manifest filtering* logic at the edge when processing requests from players to deliver HLS or DASH manifests. Such logic may use the "user\_agent" string in HTTP request headers to detect the type of the device, OS, or web browser and then dynamically decide which renditions or attributes to retain in the manifest.

For example, if the client device is classified as one that can only decode H.264/AVC streams, then only H.264/AVC streams can be retained in the manifest and the rest of them are pruned.

Such logic may generally help increase the streaming system's robustness, maintainability, and cross-platform reach. In practice, such extra logic is easily combinable with existing edge-level functions that advanced streaming systems employ for CDN selection, multi-format management, redundancy management, and other advanced delivery functions [15,27].

## 9. Conclusions

We considered the problem of fragmentation of codec support across streaming devices. We've shown that it can be practically addressed by creating multi-codec sets of renditions for HLS or DASH streaming systems with specifically optimized design of the encoding profiles, proper generation of manifests, and manifest filtering functions of the streaming platform.

We've also shown several interesting phenomena achievable with multi-codec deployments. For example, we've demonstrated that devices/clients that can decode and switch between different codecs can deliver better quality of experience than "non-switching" clients even if they use a better codec. Another critical factor is that the total number of streams needed to support the operation of such "switching" clients can be much smaller than for clients operating with just a single codec.

These factors suggest that with growing support for codec-switching functionality in streaming clients, the concept of multi-codec streaming should become increasingly more practical, cost-efficient, and deployable at a mass scale.

## References

- [1] ISO/IEC 14496-10:2003, "Information technology – Coding of audio-visual objects – Part 10: Advanced Video Coding," *ISO/IEC*, December 2003.
- [2] "Can I use" web service, <https://caniuse.com/>, March 18, 2022.
- [3] ISO/IEC 23008-2:2013, "Information technology – High efficiency coding and media delivery in heterogeneous environments – Part 2: High efficiency video coding," *ISO/IEC*, December 2013.
- [4] AV1, "AV1 Bitstream and Decoding Process Specification, Version 1.0.0," *Alliance for Open Media*, January 18, 2019.
- [5] ISO/IEC 23090-3:2021, "Information technology — Coded representation of immersive media — Part 3: Versatile video coding," *ISO/IEC*, February 2021.
- [6] T. Laude, Y. G. Adhisantoso, J. Voges, M. Munderloh and J. Ostermann, "A Comparison of JEM and AV1 with HEVC: Coding Tools, Coding Efficiency and Complexity," *2018 Picture Coding Symposium (PCS)*, 2018, pp. 36-40.
- [7] P. Topiwala, M. Krishnan, and W. Dai, "Performance comparison of VVC, AV1, and HEVC on 8-bit and 10-bit content," *Proc. SPIE 10752, Applications of Digital Image Processing XLI*, September 17 2018.
- [8] D. Grois et al., "Performance Comparison of Emerging EVC and VVC Video Coding Standards with HEVC and AV1," *SMPTE Motion Imaging Journal*, vol. 130, no. 4, pp. 1-12, May 2021.
- [9] RethinkTV research, "Media & Entertainment Transcoding Workload and Device Royalty Forecast 2020-2030", <https://rethinkresearch.biz/reports-category/rethink-tv/#media-entertainment-transcoding-workload-and-device-royalty-forecast-2020-2030>, April 30, 2021.
- [10] A. Aaron, Z. Li, M. Manohara, J. De Cock, and D. Ronca, "Per-title encode optimization," <https://medium.com/netflixtechblog/per-title-encode-optimization-7e99442b62a2>, Dec. 15 2015.
- [11] C. Chen, Y. Lin, S. Benting, and A. Kokaram, "Optimized transcoding for large scale adaptive streaming using playback statistics," in *Proc. IEEE Int. Conf. Image Proc.*, Oct 2018, pp. 3269-3273.
- [12] Y. Reznik, K. O. Lillevold, A. Jagannath, J. Greer, and J. Corley, "Optimal design of encoding profiles for ABR streaming," in *Proc. Packet Video Workshop*, Amsterdam, NL, June 12, 2018, pp. 43-47.
- [13] Y. Reznik, X. Li, K. O. Lillevold, A. Jagannath, and J. Greer, "Optimal Multi-Codec Adaptive Bitrate Streaming," in *Proc. IEEE Int. Conf. Multimedia & Expo*, Shanghai, China, 2019, pp. 348-353.
- [14] Y. Reznik, "Average Performance of Adaptive Streaming," in *Proc. Data Compression Conference (DCC'21)*, Snowbird, UT, 23-26 March 2021.
- [15] Y. Reznik, X. Li, K.O. Lillevold, R. Peck, T. Shutt, and P. Howard, "Optimizing Mass-Scale Multi-Screen Video Delivery," *SMPTE Motion Imaging Journal*, vol. 129, no. 3, pp. 26-38, April 2020.
- [16] R. Pantos and W. May, "HTTP live streaming, RFC 8216," *IETF*, 2017.

- [17] ISO/IEC 23009-1:2019, "Information technology - Dynamic adaptive streaming over HTTP (DASH) - Part 1: Media presentation description and segment formats," ISO/IEC, August 2019.
- [18] Apple, "HTTP Live Streaming (HLS) Authoring Specification for Apple Devices," [https://developer.apple.com/documentation/http\\_live\\_streaming/http\\_live\\_streaming\\_hls\\_authoring\\_specification\\_for\\_apple\\_devices](https://developer.apple.com/documentation/http_live_streaming/http_live_streaming_hls_authoring_specification_for_apple_devices), Apple, November 12, 2021.
- [19] DASH-IF, "DASH-IF Interoperability Guidelines, v.3," <https://dashif.org/docs/DASH-IF-IOP-v4.3.pdf>, DASH-IF, November 15, 2018.
- [20] CTA-5001-A, "Web Application Video Ecosystem – Content Specification", <https://cdn.cta.tech/cta/media/media/resources/standards/pdfs/cta-5001-a-final.pdf>, CTA, December 2018.
- [21] D. Wu, Y.T. Hou, W. Zhu, Y-Q. Zhang, and JM Peha, "Streaming video over the internet: approaches and directions," *IEEE Trans. CSVT*, vol. 11, no. 3, pp. 282-300, 2001.
- [22] B. Girod, M. Kalman, Y.J. Liang, and R. Zhang, "Advances in channel-adaptive video streaming," *Wireless Comm. and Mobile Comp.*, vol. 2, no. 6, pp. 573-584, 2002.
- [23] G. J. Conklin, G. S. Greenbaum, K. O. Lillevold, A. F. Lippman, and Y. A. Reznik, "Video coding for streaming media delivery on the internet," *IEEE Trans. CSVT*, vol. 11, no. 3, pp. 269-281, 2001.
- [24] Brightcove VideoCloud platform, <https://www.brightcove.com/en/onlinevideo-platform>
- [25] Brightcove Context-Aware Encoding, <https://apis.support.brightcove.com/general/overview-context-aware-encoding.html>
- [26] ITU-R Rec. BT.500, "Methodology for the subjective assessment of the quality of television pictures," *ITU-R*, October, 2019.
- [27] Y. Reznik, J. Cenzano, B. Zhang, "Transitioning Broadcast to Cloud," Proc. *2020 NAB Broadcast Engineering and Information Technology Conference*, Las Vegas, NV, May 13-14, 2020.